

NEGATIVE PRESSURE UNIT AIR-PRO/5000H




DESCRIPTION:

Negative Pressure Unit, designed to maintain negative pressure in asbestos removal activities.

The housing, front panel, and rear cover are made of powder-coated aluminum, making the unit lightweight and durable. It is specially designed for long-term use and for ease of handling.

FEATURES:

- Nominal airflow capacity of 5000 m³/h
- Variable flow control
- Automatic soft start
- HEPA filter H14: 99.995% filtration
- PU-coated nylon wheels, Ø125 mm, includes 2 brakes

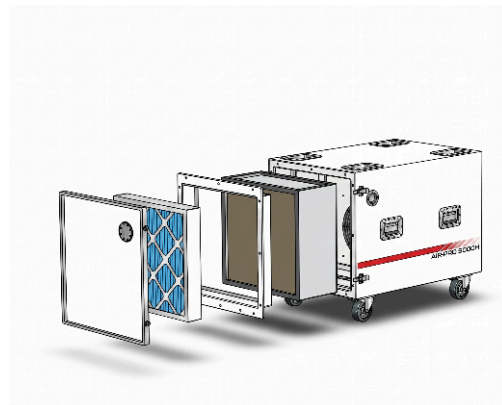

TECNICAL DATA:

- Dimensions (LxWxH): 1030x690x870 mm
- Weight: 62 kg
- Power supply: 230 Volt, 50 Hz
- Operating current: 6,5 A
- Motor power: 1,50 kW
- Exhale hose connection: Ø445 mm
- 2-step filter system:
 - Pre-filter EU4: 595x595x94 mm
 - HEPA filter acc. to EN 1822 Class H14: 610x610x292 mm

Fan characteristics:

